

INTEGRATED ENERGY WOOD AND PULPWOOD HARVESTING IN FIRST-THINNING STANDS

Kalle Kärhä ¹, Tore Högnäs ², Arto Mutikainen ³ & Heikki Pajuoja ¹

¹ Metsäteho Oy, P.O. Box 101, FI-00171 Helsinki, Finland

kalle.karha@metsateho.fi, heikki.pajuoja@metsateho.fi

² Metsähallitus, Viestitie 2, FI-87700 Kajaani, Finland

tore.hognas@metsa.fi

³ TTS Research, P.O. Box 5, FI-05201 Rajamäki, Finland

arto.mutikainen@tts.fi

ABSTRACT: The integrated harvesting of industrial roundwood and energy wood by the so-called ‘two-pile cutting method’ has increased strongly in young forests in Finland during the last two years. The studies carried out by Metsäteho Oy, Metsähallitus and TTS Research i) determined the time consumption and productivity in cutting work when using the integrated cutting of first-thinning wood, ii) clarified the development of the total removal in integrated harvesting operation, and iii) investigated the quality of pulpwood poles when using integrated cutting with multi-tree handling. The studies indicated that the total removal in integrated wood harvesting increases significantly compared to that of conventional, separate roundwood harvesting. When the total removal from the harvesting site increased considerably, there was a significant increase in the productivity of cutting work in integrated wood harvesting compared to the situation in separate pulpwood harvesting. In addition, the delimiting quality and bucking accuracy of the pulpwood poles obtained in multi-tree processing were comparable to those produced in single-tree handling. There were no problems with measuring the work output by a grapple scale attached to the boom of the forwarder. As the studies indicated very promising experiences in integrated wood cutting, integrated harvesting is likely to continue to increase in both first and later thinnings in Finland.

Keywords: Integration, Energy wood, Early thinnings.

1 INTRODUCTION

According to the National Forest Programme, the estimated annual need for first thinnings is 250,000 hectares [1]. Based on the latest forest inventory calculations, the target for first thinnings should be around 300,000 hectares/year during the next ten years [2]. During the 2000’s, however, only 167,000–256,000 hectares were thinned annually [3, 4].

In 2008, 4.0 million m³ (8.1 TWh) of commercial forest chips were used for energy generation in Finland [5]. Less than one quarter (1.9 TWh) of the total amount of forest chips was produced from small-diameter ($d_{1.3} < 10$ cm) trees in young stands [5]. Several national targets have been set to increase the annual use of forest chips up to 5 million m³ (i.e. about 10 TWh) by 2010, up to 8–12 million m³ (16–24 TWh) by 2015, and up to 12 million m³ (24 TWh) by 2020 [1, 6–8]. These targets project that the harvesting of small-sized thinning wood will triple or even quadruple, over the current harvesting volume.

High harvesting costs, particularly cutting costs, is the main problem when harvesting both energy wood and pulpwood in early thinnings. The small stem size, low removal per hectare, high number of remaining trees, and dense undergrowth, result in low productivity and high cutting costs [e.g. 9–11]. In order to increase the harvesting volumes of energy wood and pulpwood in young stands, the harvesting costs will have to be reduced significantly. One way to do this is to integrate the procurement of industrial roundwood and energy wood in early thinnings [e.g. 12].

The integrated harvesting of industrial roundwood and energy wood by the so-called ‘two-pile cutting method’ has increased strongly in young forests in Finland during the last two years. Industrial roundwood and energy wood harvested from the logging area are stacked in the cutting phase into two separate piles: a roundwood (i.e. pulpwood) pile and an energy wood pile (Fig. 1). The tops and branches of pulpwood-dimensioned trees, as well as small, undersized trees and undesirable tree

species, are stacked in the energy wood pile. The pulpwood fraction is designated for the pulping forest industry, and the energy wood fraction for energy generation.



Figure 1. The integrated wood procurement system based on the two-pile method, in which pulpwood and energy wood fractions are stacked into separate piles in early thinnings. Drawing: Juha Varhi, © Metsäteho Oy.

One year ago Metsäteho Oy and the University of Joensuu [11] conducted a survey which ranked the potential approaches for increasing the cost-efficiency of small-diameter energy wood and industrial roundwood harvesting from early thinning. The main group of actors in wood harvesting in Finland, i.e. managers in wood procurement organizations, forest machine contractors, forest machine manufacturers and vendors, and wood harvesting researchers, were interviewed in the survey. The interviewees emphasized that there is a significant potential to increase the cost-efficiency of wood harvesting in young stands by improving harvesting methods. In particular, the interviewees underlined the great potential of multiple-tree handling in industrial roundwood cuttings, grapple scale measuring, and the integration of roundwood and energy wood harvesting in early thinnings [11].

Considerable improvements have been achieved during the past year in these harvesting methods: Machine and device manufacturers have been developing harvester heads capable of multiple-tree processing for industrial roundwood cutting in early thinnings. New multi-tree processing harvester heads have been introduced and extensively tested [e.g. 13, 14]. The integrated harvesting of pulpwood and energy wood has also been used more in young stands. National guidelines and agreements have also been drawn up for the grapple scale measurement of energy wood and pulpwood [15, 16].

The studies carried out by Metsäteho Oy, Metsähallitus and TTS Research:

- i) determined the time consumption and productivity in cutting work when using the integrated cutting of first-thinning wood,
- ii) clarified the development of the total removal in integrated harvesting operation, and
- iii) investigated the quality of pulpwood poles when using integrated cutting with multi-tree handling.

The future prospects of integrated harvesting in thinnings were also examined in the study.

2 MATERIAL AND METHODS

2.1 Harvester head

The working method comparisons were conducted with a new Ponsse H53e harvester head (Fig. 2). Based on the Ponsse H53, the Ponsse H53e was launched by Ponsse Plc in 2008 [17]. A multiple-tree processing function was integrated into the Ponsse H53e harvester head, thereby undergoing a drastic redesign. Roundwood cutting with the Ponsse H53e is also possible in the traditional fashion by the single-tree processing method.

The Ponsse H53e is also suitable for the integrated cutting of roundwood and energy wood, and for separately cutting energy wood as whole trees and as delimbed stemwood. The Ponsse H53e is suitable for felling trees of less than 50 cm in diameter. The weight of the new Ponsse H53e is 850 to 900 kg [17].



Figure 2. The new Ponsse H53e harvester head with a multiple-tree processing property. Photo: Kalle Kärhä, Metsäteho Oy.

2.2 Working methods

Time studies were carried out in four first-thinning Scots pine (*Pinus sylvestris* L.) dominated stands in forest owned by UPM Forest at Kontiomäki (64°21'N, 28°09'E) in June 2008 and at Loppi (60°43'N, 24°27'E) in August 2008. The harvester was the same in all the studies (Ponsse Beaver of N & K Lukin Ky), but the operators of the harvester were changed. Both operators had several years of experience in the “traditional” cutting of thinning wood by the single-tree processing method, but only a couple of months’ experience in integrated cutting and multi-tree handling of pulpwood.

In the time study, the integrated cutting of industrial roundwood and energy wood, as well as separate cutting of roundwood (i.e. only roundwood was harvested), were tested in the studies. Multi-tree processing was utilized as much as possible in both cutting methods. A third working method was also employed in the time study carried out at Loppi: conventional pulpwood cutting by the single-tree processing method. In the time studies, all the timber classified as roundwood was cut into pulpwood.

Visual bucking was used in the integrated cutting and multiple-tree processing of pulpwood. Harvester measurement was used in cutting pulpwood by the single-tree processing method. The target top diameter of the cut pulpwood poles was 4 to 8 cm, and the target length of the Scots pine and Norway spruce (*Picea abies* L. Karst.) pulpwood poles 2.7 to 5.1 m and of birch pulpwood about 3 m. Conifer pulpwood and birch pulpwood were cut separately in all of the cutting methods.

2.3 Grapple scale measurement

A total of 4,000 trees were cut in the time study at Loppi and more than 1,200 trees at Kontiomäki. All the trees felled during the time study were hauled to the roadside landing and weighed with a grapple scale. Ponsse LoadOptimizer grapple scales were used for weighing. A total of 223 green tonnes were produced in Loppi, 182 of which was pulpwood, mainly pine pulpwood, and 41 tonnes of energy wood. A total of 63 green tonnes were produced in Kontiomäki (53 tonnes of pulpwood and 10 tonnes of energy wood).

3 RESULTS

3.1 Multiple-tree processing

In the integrated cutting of pulpwood and energy wood and the multi-tree processing of pulpwood, more than half (52% to 72% by time study plot) of the cut trees were multiple-tree processed at Loppi. Less multiple-tree processing was used at Kontiomäki, where about 39% of the harvested trees were multi-tree processed.

The average bunch size at Kontiomäki was 1.26 trees/bunch. The average size of a bunch in integrated cutting and the multiple-tree handling of pulpwood at Loppi was higher (1.48 trees/bunch) than at Kontiomäki. The diameter at breast height of the biggest trees that were multi-tree processed in the time studies was 13 to 14 cm.

3.2 Removal and cutting productivity

When integrated cutting was used, there was a considerable increase in the total volume of removal from a stand (Fig. 3): The removal roughly doubled at Loppi, when cutting most of the tops and branches of pulpwood-dimensional trees, undersized trees and undesirable tree species for energy wood. The removal at Kontiomäki increased nearly 40% in integrated cutting (Fig. 3).

There was also a significant increase in productivity in integrated cutting in the time studies: productivity in integrated cutting at Kontiomäki was almost 20% higher than in the multiple-tree cutting of pulpwood (Fig. 4). The results at Loppi were similar: productivity in integrated cutting was 11 to 37% higher than when cutting only pulpwood (Fig. 4). The increased removal in integrated cutting was the main reason for the increase in the productivity of cutting work.

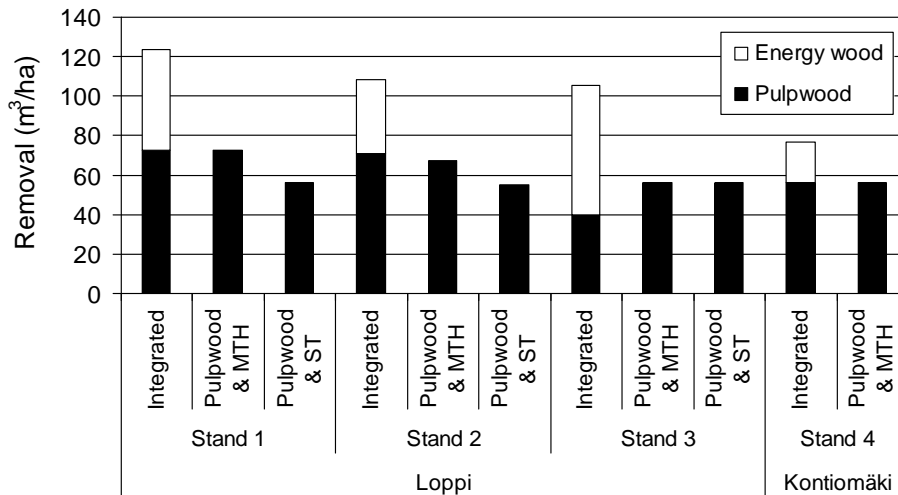


Figure 3. Total removals (pulpwood and energy wood) by time-study stand and cutting method tested: i) Integrated cutting, ii) Separate pulpwood cutting by applying multiple-tree handling (MTH), and iii) Separate pulpwood cutting based on single-tree (ST) processing.

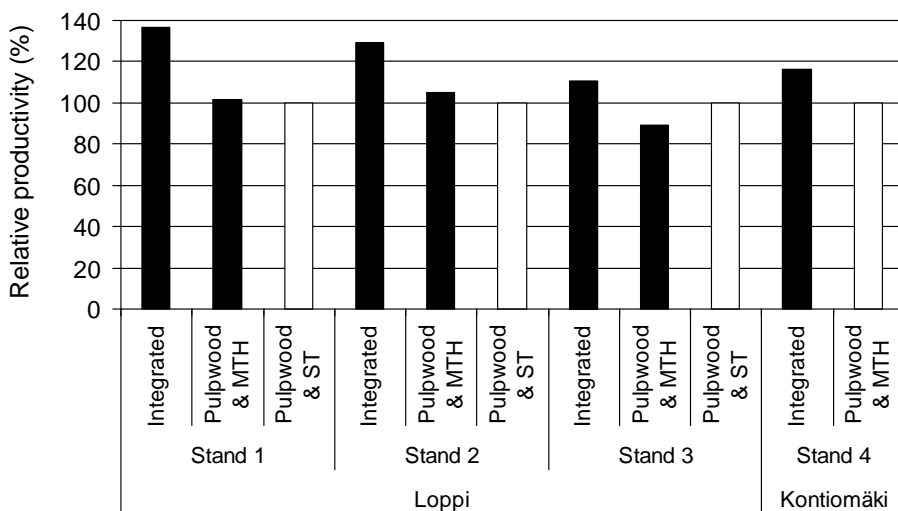


Figure 4. Relative cutting productivity by time-study stand and cutting method tested. Productivity level of 100 (white bars) = at Loppi the cutting productivity in Separate pulpwood cutting based on single-tree (ST) cutting, and at Kontiomäki in Separate pulpwood cutting by applying multiple-tree handling (MTH).

3.3 Bucking accuracy of poles

The extent to which the length and top diameter of cut pulpwood poles corresponded to the instructions in the integrated cutting and multiple-tree processing of pulpwood was also investigated at Loppi. According to the measurement results, the bucking of pulpwood poles was also successful in the integrated cutting and the multi-tree handling of pulpwood: the proportion of undersized pulpwood poles was only a few per cent in the study (Fig. 5).

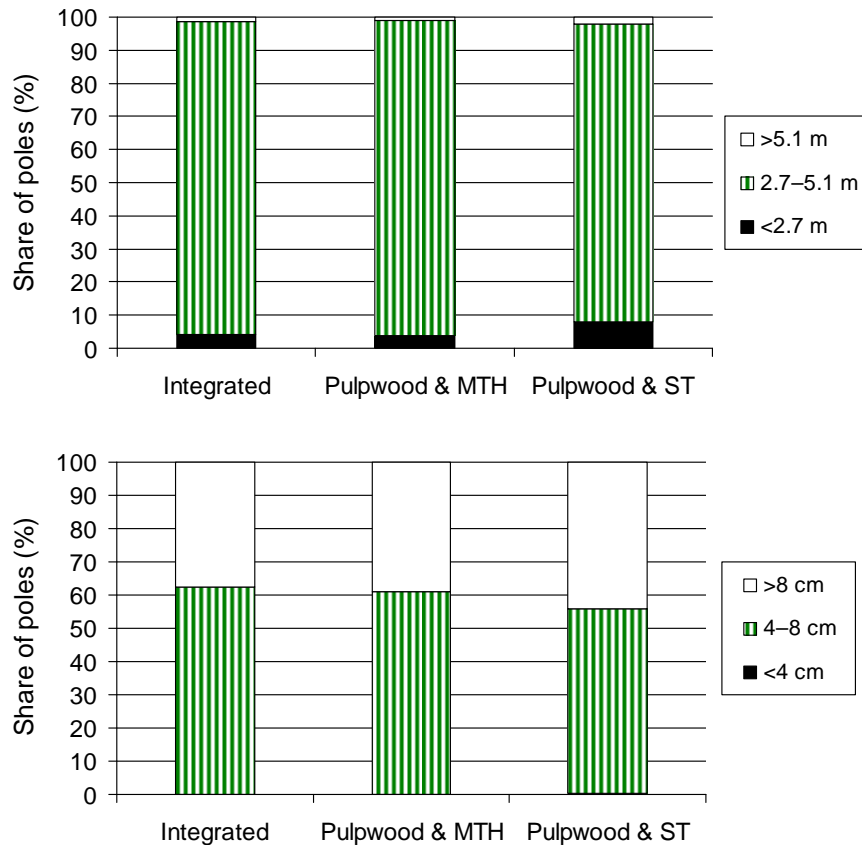


Figure 5. The length and top diameter distributions of bucked pulpwood poles by tested cutting method at Loppi.

4 DISCUSSION AND CONCLUSIONS

In the time studies, the new Ponsse H53e harvester head worked well with the multiple-tree handling function. The integrated harvesting of pulpwood and energy wood was also found to be very promising: There was a significant increase in the removal and productivity of integrated cutting, which has a positive influence on the cutting and, additionally, the harvesting costs [cf. 13]. One of the strengths of integrated harvesting is that it is also possible to diversify the sources of raw material for forest chips and improve their availability [14, 18].

The results indicate that integrated harvesting is likely to continue to increase in both first and later thinnings. The demand for pulpwood and energy wood, as well as their stumpage prices and price at the mill/plant gate, will be determined by the volume of integrated harvesting in Finland (Fig. 6).

According to the study, the quality of multiple-tree processed pulpwood is almost as good as that cut by the single-tree processing method: The top diameters and lengths of the pulpwood poles remained constant, and not too many branch stubs or poorly delimited branches were left on the poles. We now know that, from a stand marked for harvesting, it is possible to harvest by integrated cutting more pulpwood and energy wood with a high productivity. Furthermore, the measurement of work performance does not cause any problems when a grapple scale is used.

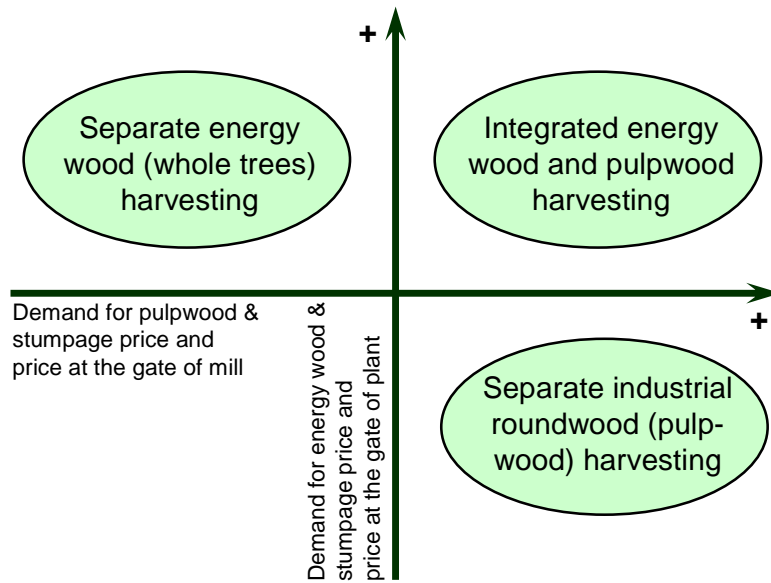


Figure 6. Principal impacts of the market situation (demand for pulpwood and energy wood, and their stumpage prices and prices at the mill/plant gate) on the volumes of integrated harvesting [14, 18].

Nevertheless, development work has still to be carried out in order to enhance the working methods applied in multi-tree cutting and integrated harvesting. In the R&D projects on integrated harvesting currently being carried out by Metsäteho Oy and its shareholders, answers are being sought to the following questions:

- How large a tree is it cost-effective to multi-tree process?
- What is the optimal bunch size in different types of stand marked for harvesting?
- What is the most effective working method in multiple-tree processing, when cutting beside the strip road and further away from the strip road?
- Where should pulpwood and energy wood piles be located in integrated cutting, and
- What is the optimal type of stand marked for harvesting for integrated harvesting?

REFERENCES

- [1] Anon. 1999. Finland's National Forest Programme 2010. Ministry of Agriculture and Forestry, Publications 2/1999.
- [2] Korhonen, K.T., Ihalainen, A., Heikkinen, J., Henttonen, H. & Pitkänen, J. 2007. Suomen metsävarat metsäkeskuksittain 2004–2006 ja metsävarojen kehitys 1996–2006. (Forest resources by forestry centre in Finland in 2004–2006 and the development of forest resources in 1996–2006). *Metsätieteen aikakauskirja* 2B/2007: 149–213. (<http://www.metla.fi/aikakauskirja/full/ff07/ff072149.pdf>).
- [3] Juntunen, M-L. & Herrala-Ylinen, H. (Eds.). 2007. *Silviculture*. In: Peltola, A. (Ed.). *Finnish Statistical Yearbook of Forestry 2007*. Finnish Forest Research Institute. SVT Agriculture, forestry and fishery 2007: 103–149.
- [4] Juntunen, M-L. & Herrala-Ylinen, H. 2009. *Metsänhoito- ja perusparannustyöt 2008. (Silvicultural and forest-improvement works, 2008)*. Finnish Forest Research Institute, *Forest Statistical Bulletin* 24/2009.
- [5] Ylitalo, E. 2009. *Puun energiakäyttö 2008. (Use of wood for energy generation in 2008)*. Finnish Forest Research Institute, *Forest Statistical Bulletin* 15/2009.

- [6] Anon. 2003. Uusiutuvan energian edistämishjelma 2003–2006. Työryhmän ehdotus. (A programme to promote renewable energy 2003–2006. Proposal of working group). Ministry of Trade and Industry, Working group and committee papers 5/2003. ([http://julkaisurekisteri.ktm.fi/ktm_jur/ktmjur.nsf/all/4B1BDE137F9B5121C2256CE5002B3AC1/\\$file/tyto5eos.pdf](http://julkaisurekisteri.ktm.fi/ktm_jur/ktmjur.nsf/all/4B1BDE137F9B5121C2256CE5002B3AC1/$file/tyto5eos.pdf)).
- [7] Anon. 2008. Finland's National Forest Programme 2015. Ministry of Agriculture and Forestry, Publications 3b/2008. (<http://www.fao.org/forestry/media/14177/0/0/>).
- [8] Anon. 2008. Long-term Climate and Energy Strategy. Government Report to Parliament 6 November 2008. Publications of the Ministry of Employment and the Economy, Energy and climate 36/2008. (http://www.tem.fi/files/21079/TEMjul_36_2008_energia_ja_ilmasto.pdf).
- [9] Kärhä, K., Rönkkö, E. & Gumse, S-I. 2004. Productivity and Cutting Costs of Thinning Harvesters. International Journal of Forest Engineering 15(2): 43–56.
- [10] Kärhä, K., Jouhio, A., Mutikainen, A. & Mattila, M. 2005. Mechanized Energy Wood Harvesting from Early Thinnings. International Journal of Forest Engineering 16(1): 15–26.
- [11] Oikari, M., Kärhä, K., Palander, T., Pajujoja, H. & Ovaskainen, H. 2008. Increasing the cost-efficiency of wood harvesting from young stands in Finland. Metsäteho Review 36. (http://www.metsateho.fi/uploads/Katsaus_36_1.pdf).
- [12] Kärhä, K. 2007. Towards More Cost-Efficient Harvesting of Energy Wood and Pulpwood in Early Thinnings. In: Savolainen, M. (Ed.). Book of Proceedings. Bioenergy 2007, 3rd International Bioenergy Conference and Exhibition, 3rd–6th September 2007, Jyväskylä Paviljonki, Finland. Finbio Publications 36: 443–451.
- [13] Kärhä, K. 2008. Integration of small-diameter wood harvesting in early thinnings using the two-pile cutting method. In: World Bioenergy 2008, Proceedings of Poster Session. World Bioenergy 2008 Conference & Exhibition on Biomass for Energy, 27th–29th May 2008, Jönköping, Sweden. p. 124–128.
- [14] Kärhä, K. & Mutikainen, A. 2008. Integrated cutting of first-thinning wood with a Moipu 400ES. TTS Research, Forestry Bulletin 726.
- [15] Lindblad, J., Äijälä, O. & Koistinen, A. 2008. Energiapuun mittaus. (Measurement of energy wood). Metsätalouden kehittämiskeskus Tapio ja Metsäntutkimuslaitos. (<http://www.metla.fi/metinfo/tietopaketit/mittaus/aineistoja/energiapuun-mittausopas-2008.pdf>).
- [16] Melkas, T. 2009. Kuormainvaakamittaus uudistuu. (Regeneration of grapple scale measurement). Metsäteho Tuloskalvosarja 11/2009. (http://www.metsateho.fi/uploads/Tiedote_11_2009_Tuloskalvosarja_2009_11_Kuormainvaakamittaus_uudistuu_tm_1.pdf).
- [17] Ponsse H53e harvester head. (http://www.ponsse.com/english/products/harvester_head/h53.php).
- [18] Kärhä, K., Högnäs, T., Kumpare, T., Kovettu, A. & Mutikainen, A. 2009. Ponsse H53e ensiharvennuskoneen integroidussa hakkuussa. (Integrated cutting of Scots pine first-thinning wood with a Ponsse H53e). Metsäteho Tuloskalvosarja 5/2009. (http://www.metsateho.fi/uploads/Tuloskalvosarja_2009_05_Ponsse%20H53e_kk.pdf).